


HEAVY DUTY SELF-DUMP BUCKETS



Turn your forklift into a loader with the Star Industries Self-Dump Bucket. The bucket installs in minutes and is the perfect solution for loading loose material. No modification to the forklift is required. A hydraulic dump option is also available.

- Load sand, gravel, mulch and most other material
- Manual dump and hydraulic dump models available
- Slips on the forks — installs in minutes

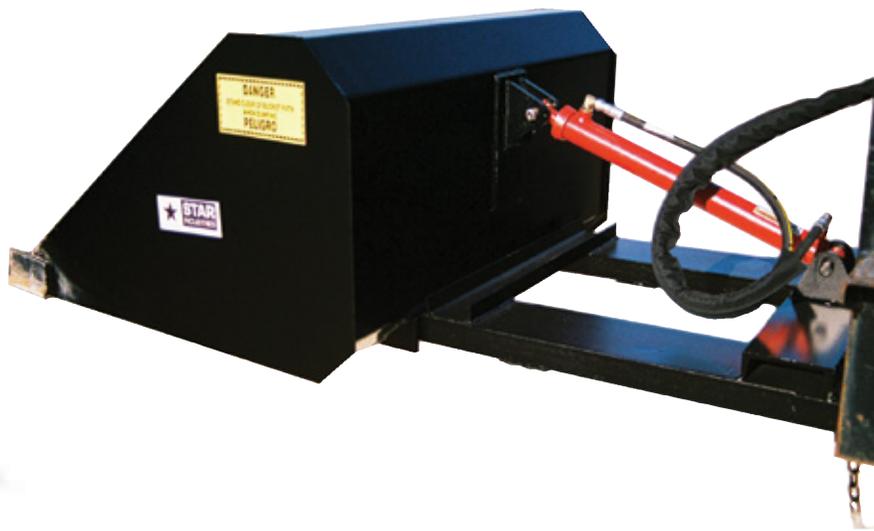

4101 Garland Drive Fort Worth TX 76117
Phone | 817-485-6073 Fax | 817-428-6008
USA & Canada Toll Free 800-541-1797

www.starindustries.com
Operating Manual and Safety
Information available online.

PRODUCT OPTIONS



MANUAL SELF-DUMP BUCKETS

No modifications or hydraulics required. Simply slide the bucket on the forks and insert the pins to lock it on. The bucket can be tripped with the handle at the back of the bucket or from the operator's seat with the remote rope release. Lowering the bucket to the ground resets the bucket for the next load. The safety lock prevents accidental tripping of the bucket release during transport.

Model	Width	Capacity	Weight
1440SD	45" ID	¼ cuyd	420 lbs
1445SD	45" ID	½ cuyd	525 lbs
1472SD	72" ID	¾ cuyd	668 lbs
1484SD	84" ID	1 cuyd	790 lbs



HYDRAULIC SELF-DUMP BUCKETS

The Hydraulic self-dump bucket provides precise control of the discharge. Hydraulic flow from the forklift is required (hydraulic control valve not included). If the forklift is equipped with a hydraulic side shift, flow from that valve can typically be diverted to the bucket cylinder.

Model	Width	Capacity	Weight
1445SDH	45" ID	½ cuyd	600 lbs
1472SDH	72" ID	¾ cuyd	760 lbs
1484SDH	84" ID	1 cuyd	860 lbs


* Specify length, thickness and width of forks when ordering

BUCKET IN DUMP POSITION

Applies to Manual & Hydraulic

Available in ¼, ½, ¾ or 1 cuyd capacities. There is a bucket to match almost any application. The Star Self-Dump Bucket is ideal for many applications but especially useful for masonry supply and landscape supply companies loading small quantities of sand top soil, mulch, or other landscape materials.

Capacity	A	B	C	D
¼ cuyd	57"	18"	19"	60°
½ cuyd	65"	25"	23"	52°
¾ cuyd	65"	25"	23"	52°
1 cuyd	65"	25"	23"	52°

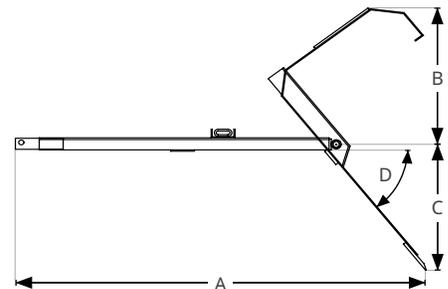

4101 Garland Drive Fort Worth TX 76117
 Phone | 817-485-6073 Fax | 817-428-6008
 USA & Canada Toll Free 800-541-1797

www.starindustries.com
 Operating Manual and Safety
 Information available online.